
PRODUCT DATA DRAWING

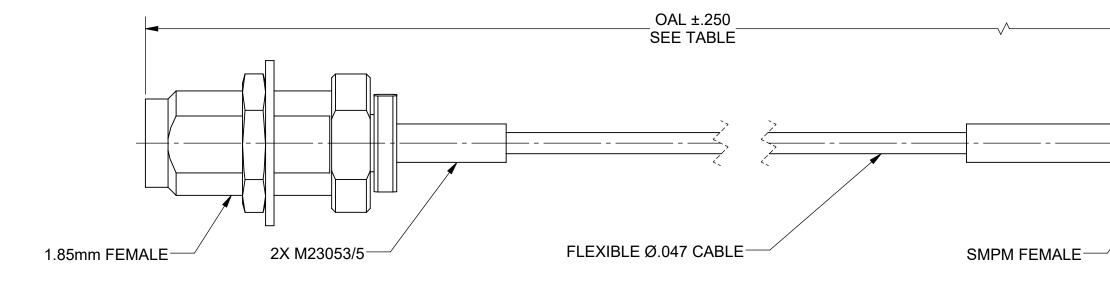

COMPONENTS:

CONNECTORS:	1.85mm FEMALE (SF3321-60004) SMPM FEMALE (3221-40007)
CABLE:	FLEXIBLE Ø.047 CABLE (200-70-479)
SHRINK TUBING:	M23053/5
PERFORMANCE:	
IMPEDANCE: FREQ. RANGE:	50 OHMS DC TO 65.0 GHz

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: +1/64 ANGULAR: X° +1°0'	UNLESS (
FINISH:	SEE NOTES	X°X' ±15' DECIMAL: .X ±.030 .XX ±.010	1) ALL DIMENSIONS 2) ALL DIMENSIONS 3) BREAK CORNERS 4) CHAM, 1ST & LAS
SURFACE AREA: N/A		.XXX ±.005	5) SURFACE ROUG 6) DIA.'S ON COMM WITHIN .005 T.I.F 7) REMOVE ALL BU
	PROPRIETARY	PER ASME Y14.5M - 1994	1711211012712200
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF		THIRD ANGLE PROJECTION	DRAWN:
			CHECKED
	E, INC IS PROHIBITED.		APPROVE

	REV	DESCRIPTION	ON HISTORY DATE	APPROVED
	A	DCN 52742	07/23	
	~	001102142	01120	SEE PDM
		_		
		L-		
	1			
	++	┤╫╂══┲╗╌╴		
		<u>⊢</u> ∏==₽		
		-		
	/			
/				

		SV/PN		OAL	
		7033-0044		6.000	
	70	7033-0045		12.000	
OTHERWISE SPECIFIE	ED	S			F
NS ARE IN INCHES [MILLIMETERS] NS ARE AFTER PLATING. ERS & EDGES .005 R. MAX. AST THREADS.		www.svmicrowave.com			
JGHNESS 63∉MIL-STD-10. IMON CENTERS TO BE CONCENTRIC	с ТІТ	TITLE: 1.85mm FEMALE BULKHEAD			
.I.R. BURRS		TO S	SMPM	FEMALE Ø	ð.047
BFB 02/28			CABLE	ASSEMBL	Y
D: SEE PE	DM B		703	3-0044-0	045
'ED: SEE PI	DM	SCALE: 1:2			SHEET 1 OF 1