
## **PRODUCT D**

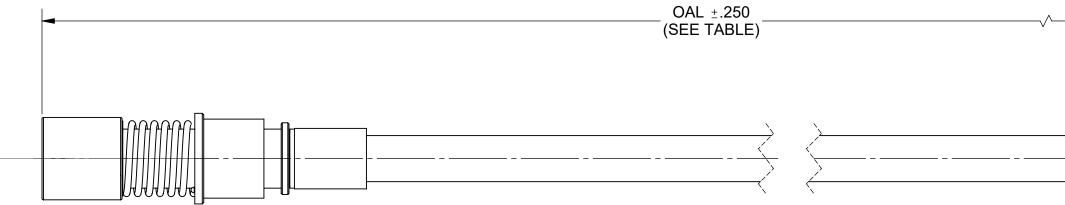

## MATERIAL:

BMA (SIZE 8) D38999 SOCKET CONTACT (SF9411-6001) CONNECTORS:

SMA PLUG (SF2902-6005)

T-FLEX 402 CABLE:

SHRINK TUBING: M23053/5

## **PERFORMANCE:**

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 18.0 GHz

			1				
			REV		REVISION HIST	DRY DATE	APPROVED
			-		44389	11/19	
DATA DRAWIN	6		A	DCN	51621	05/22	SEE PDM
NOTE			-	SV P/N		OAL	
NOTE: ALL SOCKET CONTACTS DESIGNED FOR SERIES I, III OR IV.			Ļ	7093-0182		12.0	
				7	7093-0183	24.0	
MATERIAL:SEE NOTESFINISH:SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 .XX ±.010 .XX ±.005	UNLESS OTHERWISE SP 1) ALL DIMENSIONS ARE IN INCHES [MILLIM 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES.005 R. MAX. 4) CHAM. IST & LAST THREADS. 5) SURFACE ROUGHNESS 63.MIL.STD-10. 6) DAI'S ON COMMON CENTERS TO BE CON WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	IETERS]	D	Amphenol WWW.svmicrowave.com		
SURFACE AREA: N/A PROPRIETARY	.XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994		NCENTRIC		TITLE: BMA (SIZE 8) D38999 SOCKET CONTACT TO SMA MALE FOR Ø.1 T-FLEX 402 CABLE ASSEMBLY		FOR Ø.141
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC.	THIRD ANGLE PROJECTION				SIZE DWG. NO. 7002 0102 01		
ANY REPRODUCTION IN PART OR AS A WHOLE		CHECKED: SI	EE PDI	N/I [	B		