


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 48367	06/24	SEE PDM

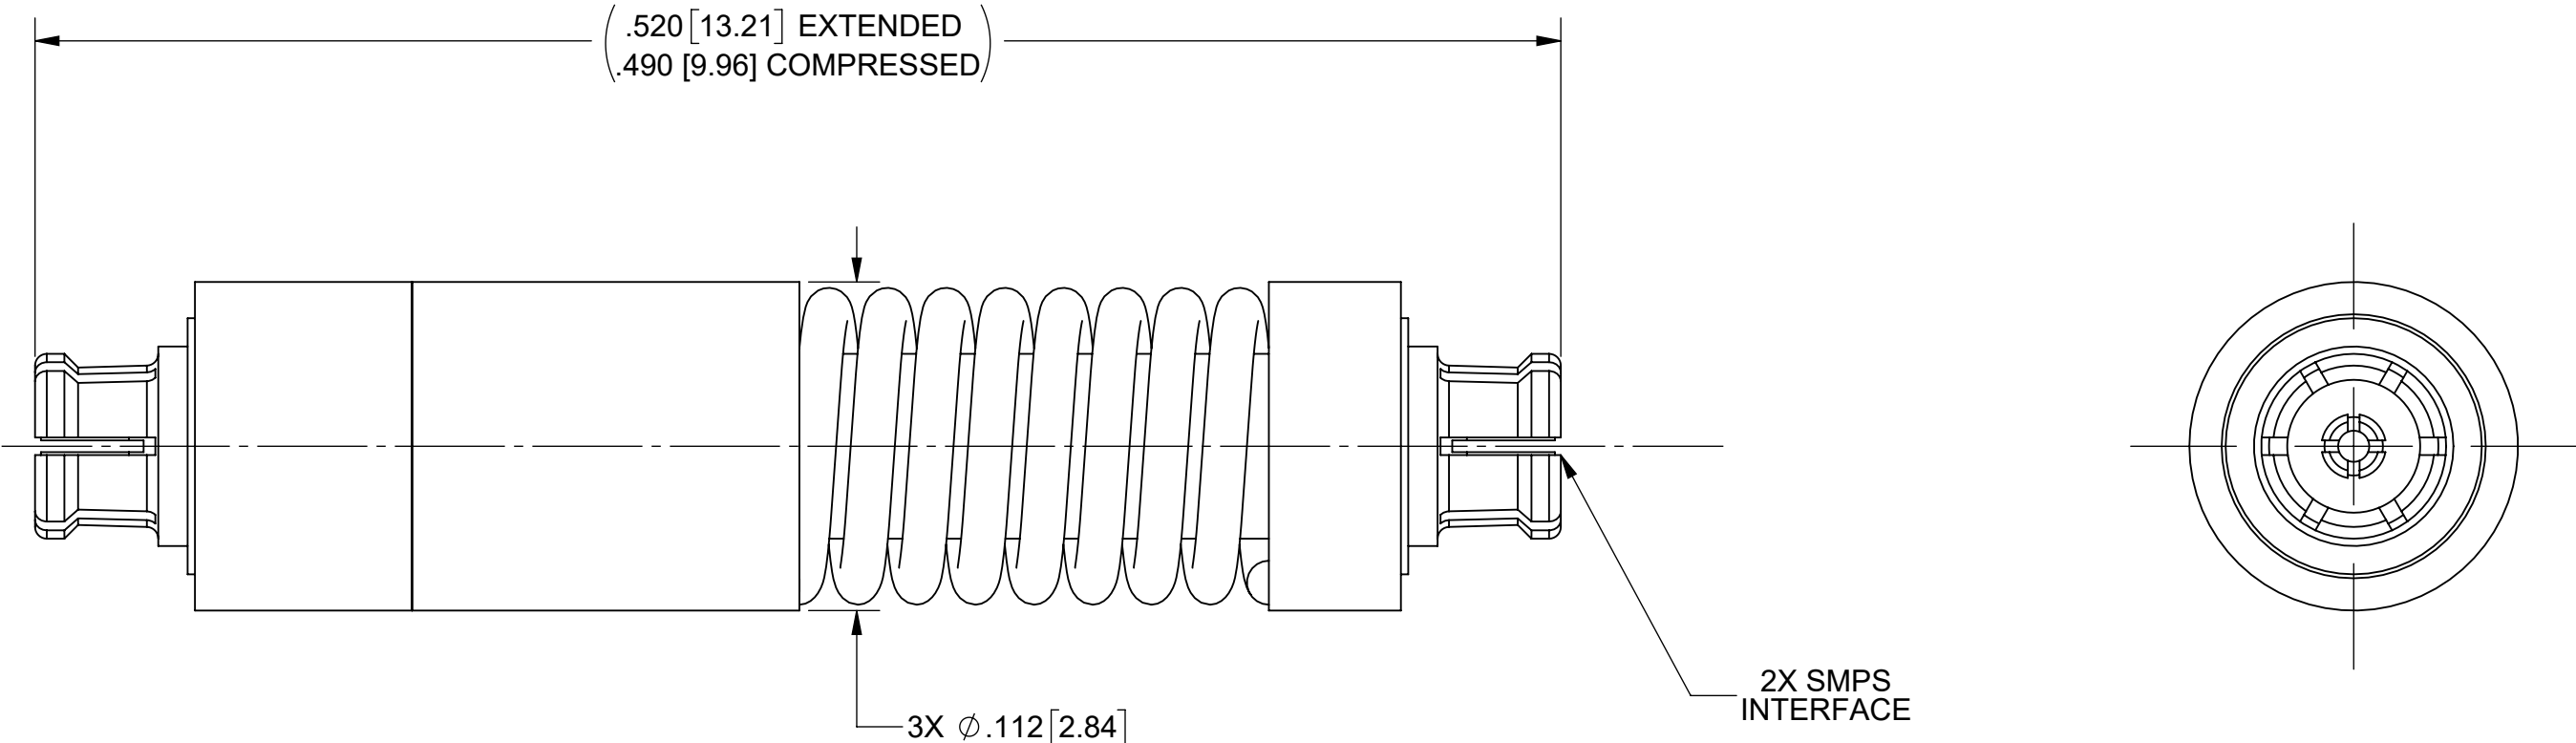

MATERIALS:

BODIES & CONTACTS: BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04.

INSULATORS: PTFE PER ASTM D1710.

SPRING: MUSIC WIRE PER ASTM A228

FINISHES:

BODIES & CONTACTS: GOLD PER ASTM B488, TYPE II GRADE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, .000050" MINIMUM.


SPRING: ZINC PER ASTM-B633, TYPE II, SERVICE CONDITION SC1, .0002" MIN,

PERFORMANCE:

IMPEDANCE: 50 OHMS.

FREQ. RANGE: DC TO 65 GHz.

AXIAL COMPRESSION: .030 NOMINAL

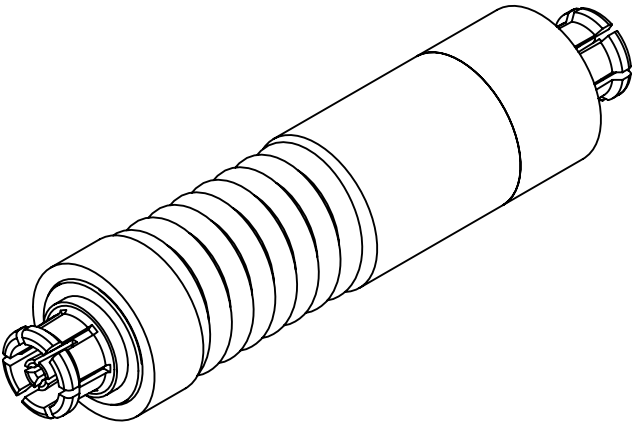

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'
-----------	-----------	---