

ROHS COMPLIANT

PRODUCT DATA DRAWING



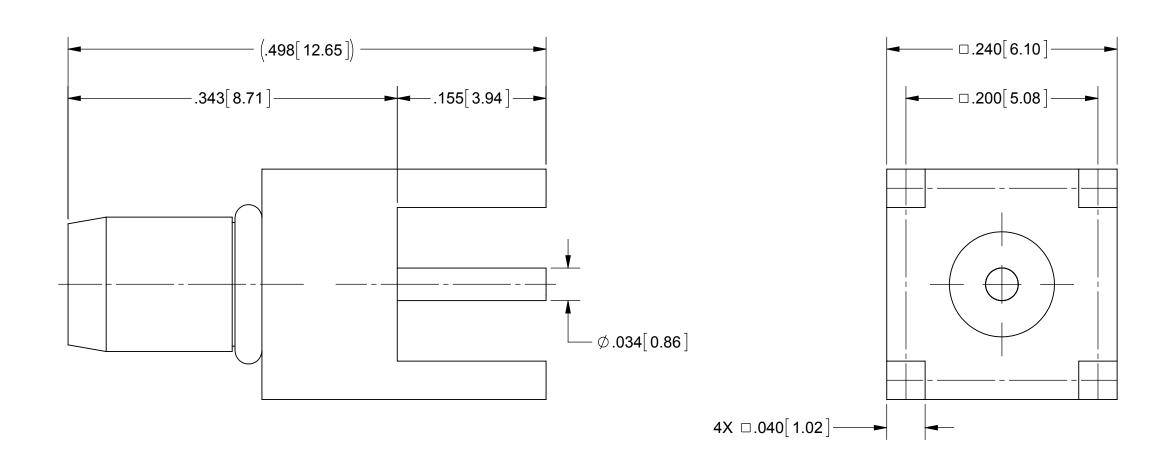

MATERIAL:

BODY:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1; OR ASTM A582 TYPE 303, COND A

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACT:

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATOR:**

O-RING: **FLUOROSILICONE**

FINISH:

BODY & CONTACT: GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76, OVER NICKEL

PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

NOTES:

1. FOR A FOOTPRINT RECOMMENDATION SPECIFIC TO YOUR PCB, PLEASE CONTACT US AT applications@svmicro.com

MATERIAL: FINISH:	SEE NOTES SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 .XX ±.010	UNLESS OTHERV 1) ALL DIMENSIONS ARE IN INC 2) ALL DIMENSIONS ARE AFTER 3) BREAK CORNERS & EDGES 3) BREAK CORNERS & EDGES	HES [MILLIMETERS] R PLATING. 005 R. MAX.	Amphenol MICROWAVE 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409			
SURFACE AREA: N/A PROPRIETARY		INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS		TITLE:	BMMA PLUG PCB MOUNT		
	ATION CONTAINED IN THIS DRAWING PROPERTY OF SV MICROWAVE, INC. JUCTION IN PART OR AS A WHOLE E WRITTEN PERMISSION OF VE, INC IS PROHIBITED.	THIRD ANGLE PROJECTION	DRAWN:	BRT 08/05/02				
ANY REPROD		⊕ €	CHECKED:	STW 08/05/02	SIZE CAGE CODE B 95077	DWG. NO. 1485	-6000	
SV MICROWAV			APPROVED:	STW 08/05/02	SCALE: 10:1		SHEET 1 OF 1	