
PRODUCT DATA DRAWING

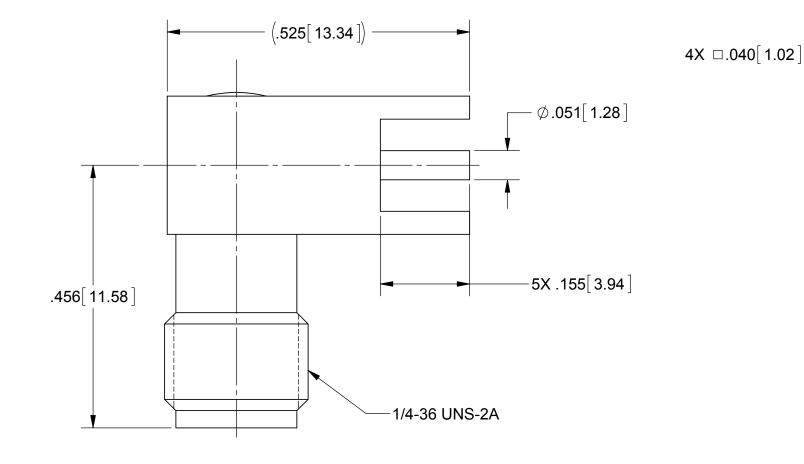

MATERIAL:

BODY:	STAINLESS STEEL PER AMS-5640,
	ALLOY UNS S30300, TYPE 1

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACT:

BRASS PER ASTM B16, ALLOY UNS No. C36000 TERMINAL:

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATORS:**

FINISH:

BODY, CONTACT & TERMINAL: GOLD PER ASTM B 488, TYPE II,

NOTES:

1. FOR A FOOTPRINT RECOMMENDATION SPECIFIC TO YOUR PCB, PLEASE CONTACT US AT applications@svmicro.com

	PER AMS-QQ-N-290, CLASS 1, .00010" MIN.		SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'	UNLESS OTHERWISE SPECIFIED		SV Microwave, Inc.	
		FINISH:	SEE NOTES	DECIMAL: 1.00 X*X' ±15' .XX ±.010 .XX ±.005	 ALL DIMENSIONS ARE IN INCH ALL DIMENSIONS ARE AFTER BREAK CORNERS & EDGES .0 CHAM, 1ST & LAST THREADS. 		2400 Ce We	ntrepark West Drive, Suite 100 st Palm Beach, FL 33409
PERFORMANCE:		SURFACE AR	^{EA:} N/A PROPRIETARY	XXX ±005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	 SURFACE ROUGHNESS 63MI DIA.'S ON COMMON CENTERS WITHIN .005 T.I.R. REMOVE ALL BURRS 		-	R/A JACK FOR CIRCUIT BOARD
IMPEDANCE:	50 OHMS	THE INFORMAT	FION CONTAINED IN THIS DRAWING	THIRD ANGLE PROJECTION	DRAWN:	RD 07/08/77	SIZE CAGE CODE D	
FREQ. RANGE:	DC TO 12.4 GHz	ANY REPRODU	ROPERTY OF SV MICROWAVE, INC. ICTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF		CHECKED:		B 95077	^{wg. no.} 2986-6001
			E, INC IS PROHIBITED.		APPROVED:	DGG 07/13/77	SCALE: 4:1	SHEET 1 OF 1

	REV	REVISION HISTO DESCRIPTION	DRY DATE	APPROVED
	A	DCN 39115	05/12	STW
□.240[6.10]	-		
		(.576[14.63	;])	