

ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY					
REV	DESCRIPTION	DATE	APPROVED		
Α	DCN 41793	10/15	DAL		

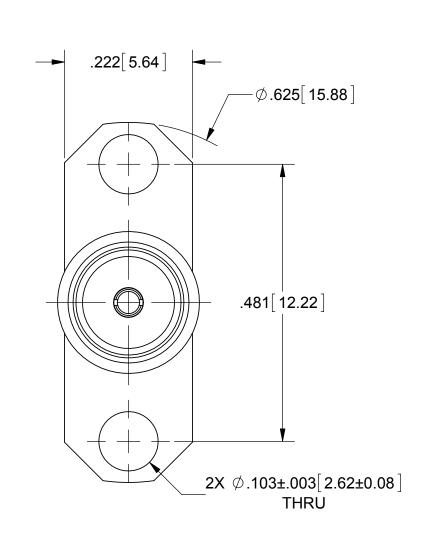

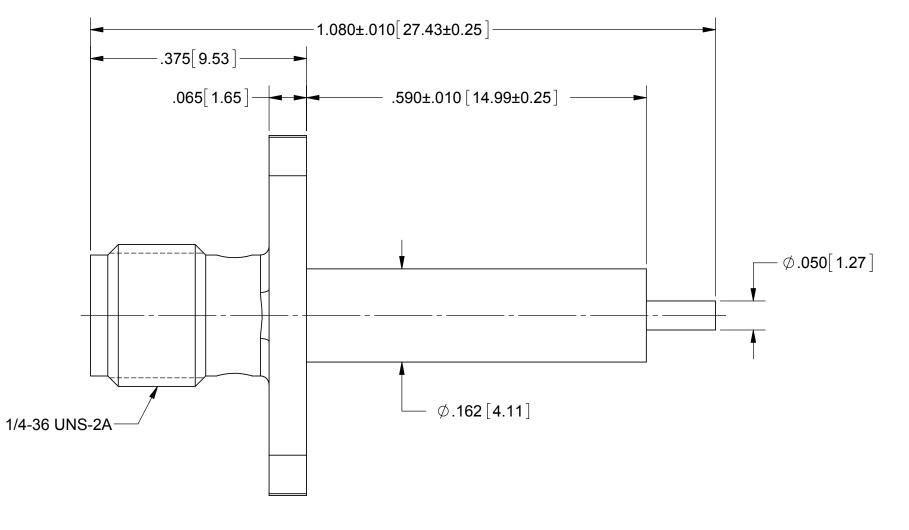

MATERIAL:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 BODY:

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACT:

INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

BODY: PASSIVATED PER AMS 2700

GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76, OVER NICKEL CONTACT:

PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz

MATERIAL: SEE NOTES				
FINISH: SEE NOTES				
SURFACE AREA: N/A				
PROPRIETARY				
THE INFORMATION CONTAINED IN THIS DRAWIN IS THE SOLE PROPERTY OF SV MICROWAVE, IN ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.				

DIMENSIONS ARE IN INCHES TOLERANCES:					
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'					
DECIMAL: X ±.030 .XX ±.010 .XXX ±.005					
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994					
THIRD ANGLE PROJECTION					

UNLESS OTHERWISE SPECIFIED
1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES 005 R. MAX. 4) CHAM. 15T & LAST THREAD ST. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DAS. SON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS

4) CHAM. 1ST & LAST THREA 5) SURFACE ROUGHNESS 65 6) DIA.'S ON COMMON CENTI WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	BeMIL-STD-10.
DRAWN:	BNK 10/21/15
CHECKED:	DAI 10/21/15

APPROVED:

SV Microwave, Inc.

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

SMA JACK, 2 HOLE FLANGE MOUNT PANEL RECEPTACLE

DAL 10/21/15	SIZE	95077	DWG. NO. SF2950	-6200
DGG 09/13/76	S	CALE: 6:1		SHEET 1 OF