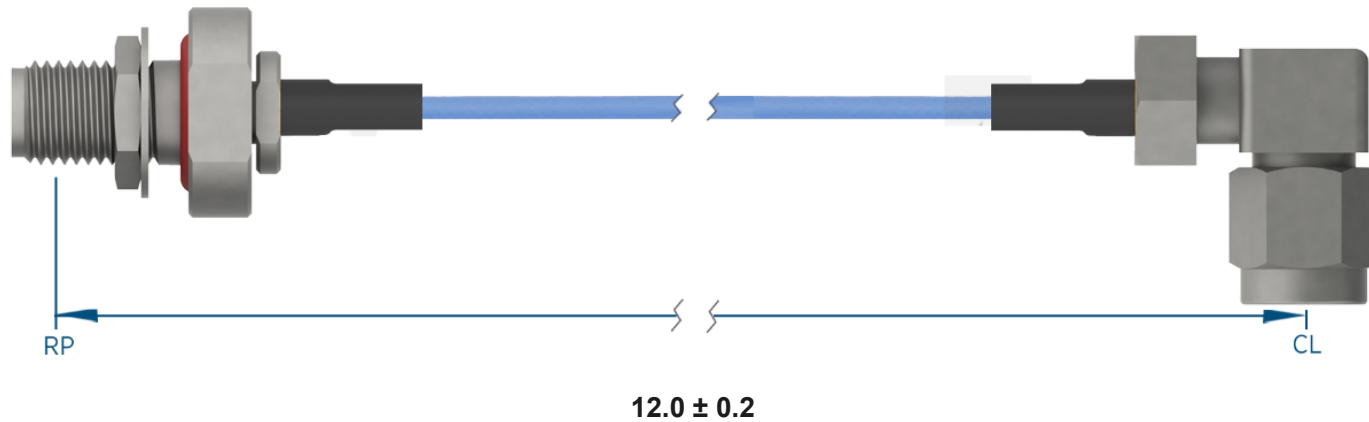


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: 2.92mm Bulkhead Female (SF1521-60045)  
SMA R/A Male (2912-61002)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 2.26 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

2.92mm Bulkhead Female to SMA R/A Male 12" Cable  
Assembly for Ø.047 Flexible Coax

## DWG. NO.

FB292-047-MRSMA-120

## DRAWN

2022-10-14 14:03:56