
ROHS COMPLIANT

PRODUCT DATA DRAWING



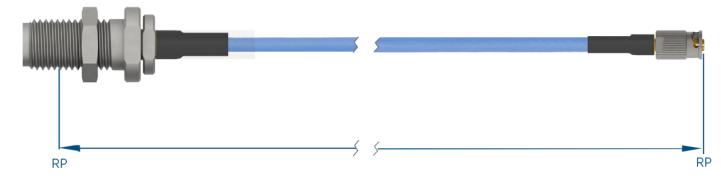

MATERIAL

CONNECTORS:	2.92mm Bulkhead Female (SF1521-60025)
	SMPM Female QB (3221-60004)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE:	50 Ohms
FREQ. RANGE:	DC to 40 GHz
VSWR:	1.3:1 Max, DC to 18.0 GHz 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.03 dB Max

NOTES

1. See individual data drawings for connector specifications

2. Dimensions shown are in inches



TITLE:

2.92mm Bulkhead Female to SMPM Female QB 18" Cable Assembly for Ø.085 Flexible Coax

DWG. NO.

FB292-085-FQSMPM-180

DRAWN

2022-10-17 11:58:07