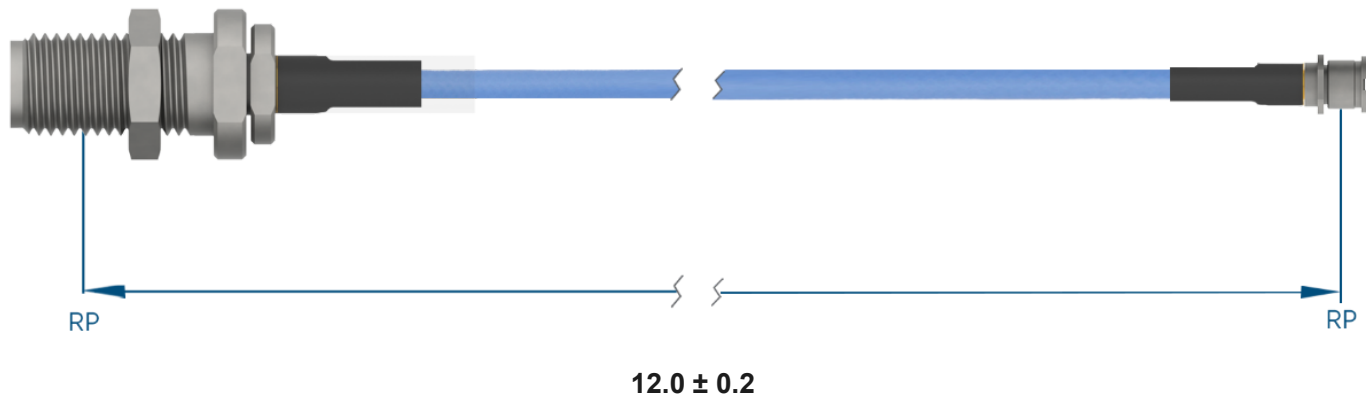


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: 2.92mm Bulkhead Female (SF1521-60025)  
 SMP Male Bulkhead (SF1211-6061)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 26.5 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 1.61 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

2.92mm Bulkhead Female to SMP Male Bulkhead 12"  
 Cable Assembly for Ø.085 Flexible Coax

## DWG. NO.

FB292-085-MBSMP-120

## DRAWN

2022-10-17 11:59:17