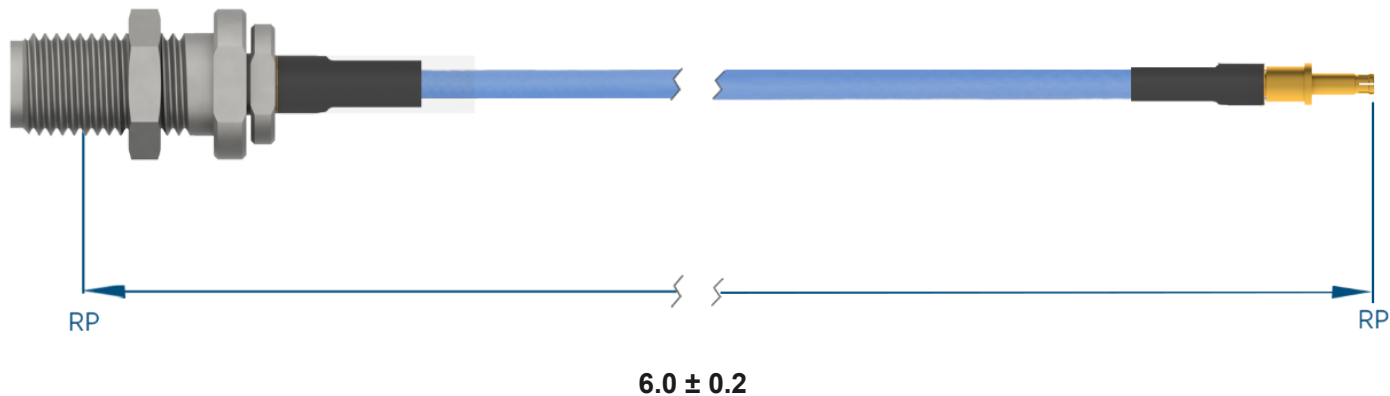


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: 2.92mm Bulkhead Female (SF1521-60025)
 SMPM Size 12 Pin (3221-4002)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.4:1 Max, DC to 18.0 GHz
 1.6:1 Max, 18.0 + GHz

INSERTION LOSS: 1.35 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

2.92mm Bulkhead Female to SMPM Size 12 Pin 6"
 Cable Assembly for Ø.085 Flexible Coax

DWG. NO.

FB292-085-P12DSMPM-060

DRAWN

2022-10-17 12:01:27