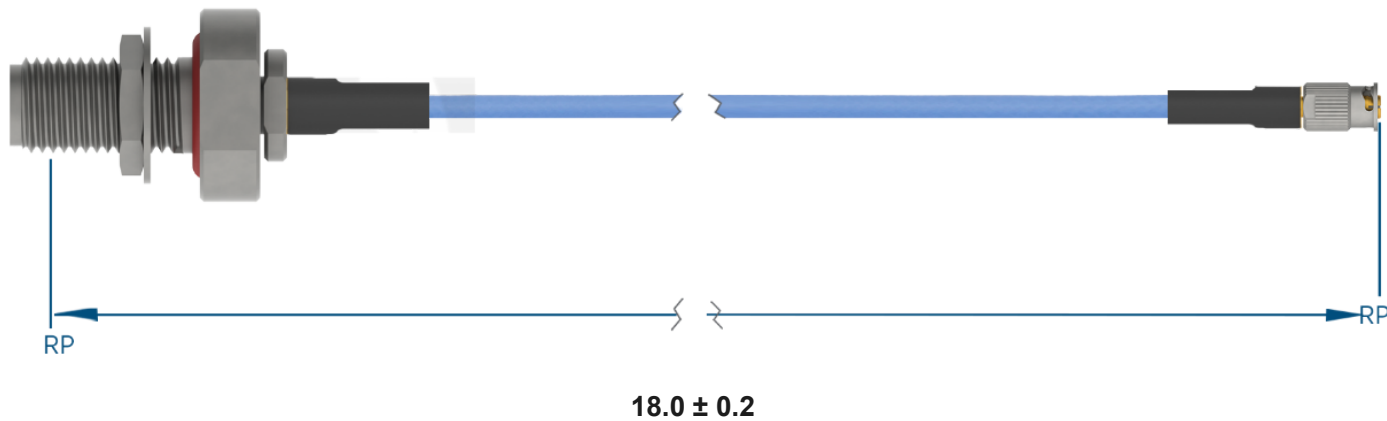


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMA Bulkhead Female (2944-6001)  
 SMP Female QB (1221-40051)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.22 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

SMA Bulkhead Female to SMP Female QB 18" Cable  
 Assembly for Ø.047 Flexible Coax

## DWG. NO.

FBSMA-047-FQSMP-180

## DRAWN

2022-10-17 12:08:06