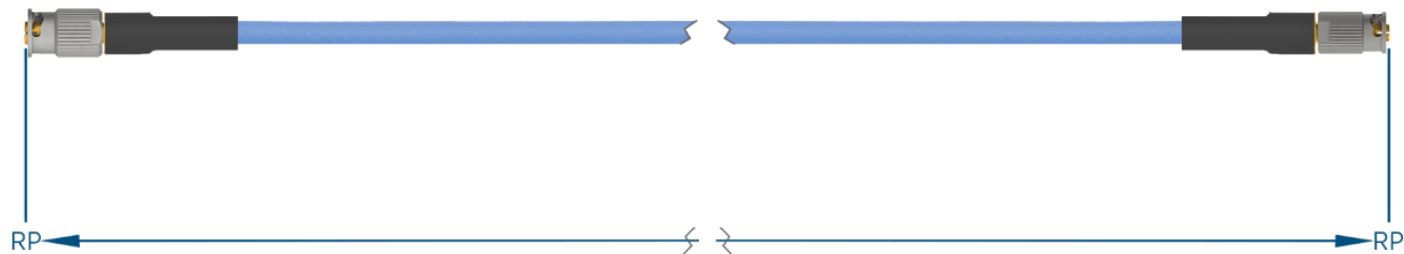


PRODUCT DATA DRAWING

 12.0 ± 0.2 **MATERIAL**

CONNECTORS: SMP Female QB (1221-40051)
SMPM Female QB (3221-60003)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.27 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMP Female QB to SMPM Female QB 12" Cable
Assembly for Ø.047 Flexible Coax

DWG. NO.

FQSMP-047-FQSMPM-120

DRAWN

2022-10-17 12:34:43