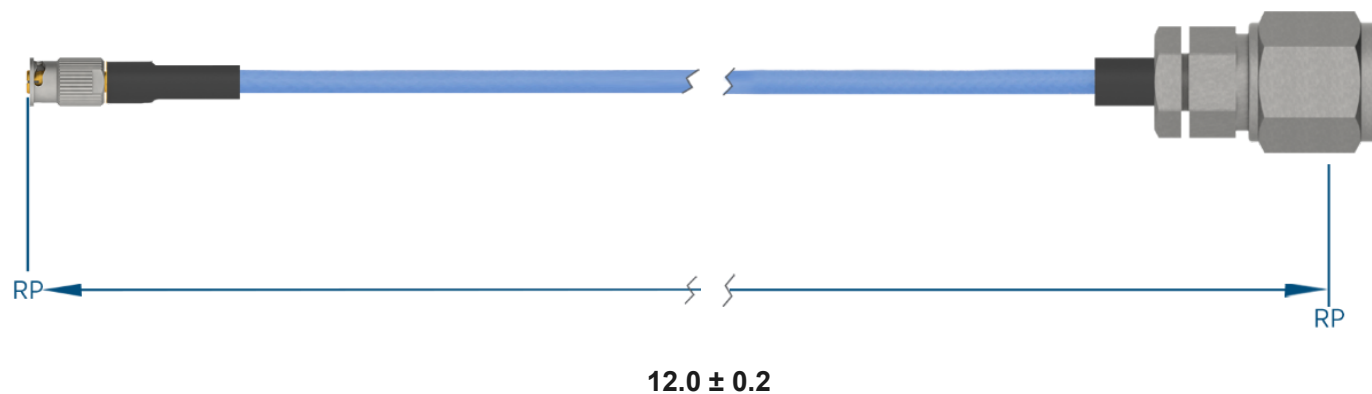


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMP Female QB (1221-40051)  
1.85mm Straight Male (SF3311-60002)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.27 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches

**TITLE:**

SMP Female QB to 1.85mm Straight Male 12" Cable  
Assembly for Ø.047 Flexible Coax

**DWG. NO.**

FQSMP-047-MS185-120

**DRAWN**

2022-10-17 14:09:50