


PRODUCT DATA DRAWING

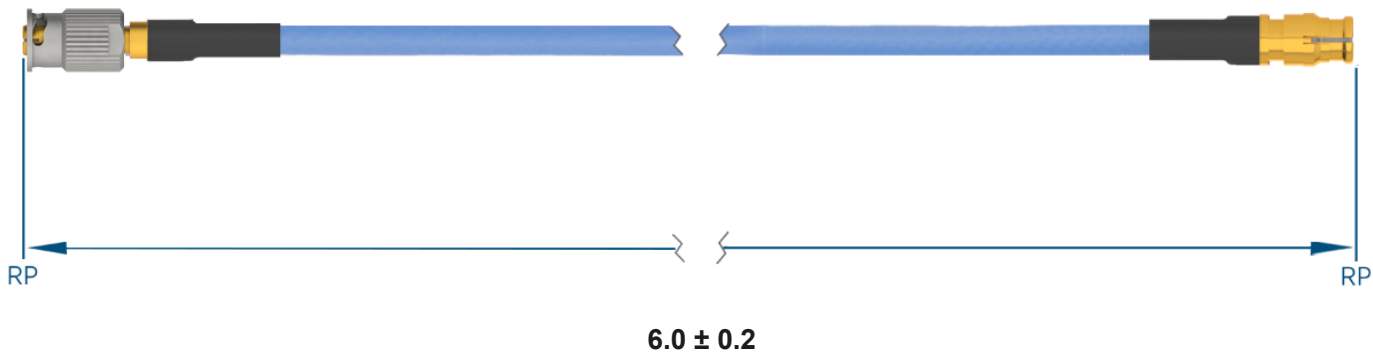

MATERIAL

CONNECTORS: SMP Female QB (1221-40049)
SMP Straight Female (1221-4009)
CABLE: Ø.085 Flexible Coax
SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms
FREQ. RANGE: DC to 40 GHz
VSWR: 1.4:1 Max, DC to 18.0 GHz
1.6:1 Max, 18.0 + GHz
INSERTION LOSS: 1.35 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:
SMP Female QB to SMP Straight Female 6" Cable
Assembly for Ø.085 Flexible Coax

DWG. NO.
FQSMP-085-FSSMP-060

DRAWN
2022-10-17 14:30:07