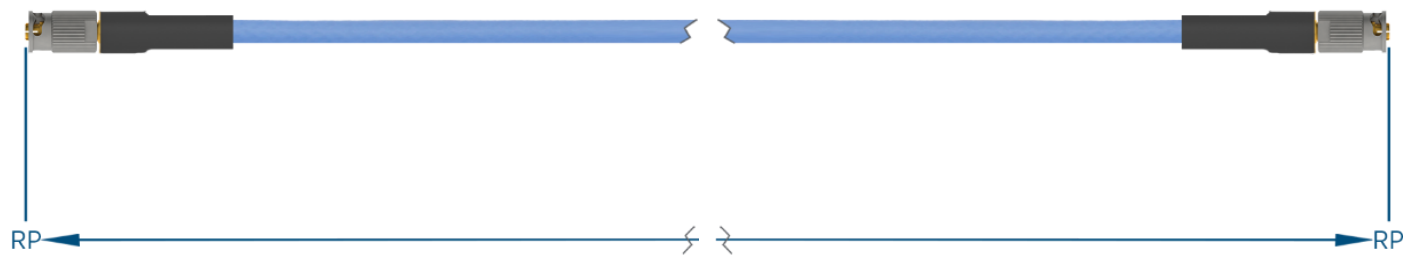


## PRODUCT DATA DRAWING

 $12.0 \pm 0.2$ **MATERIAL**

CONNECTORS: SMPM Female QB (3221-60003)  
SMPM Female QB (3221-60003)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 65 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 4.60 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

SMPM Female QB to SMPM Female QB 12" Cable  
Assembly for Ø.047 Flexible Coax

## DWG. NO.

FQSMPM-047-FQSMPM-120

## DRAWN

2022-10-17 15:29:11