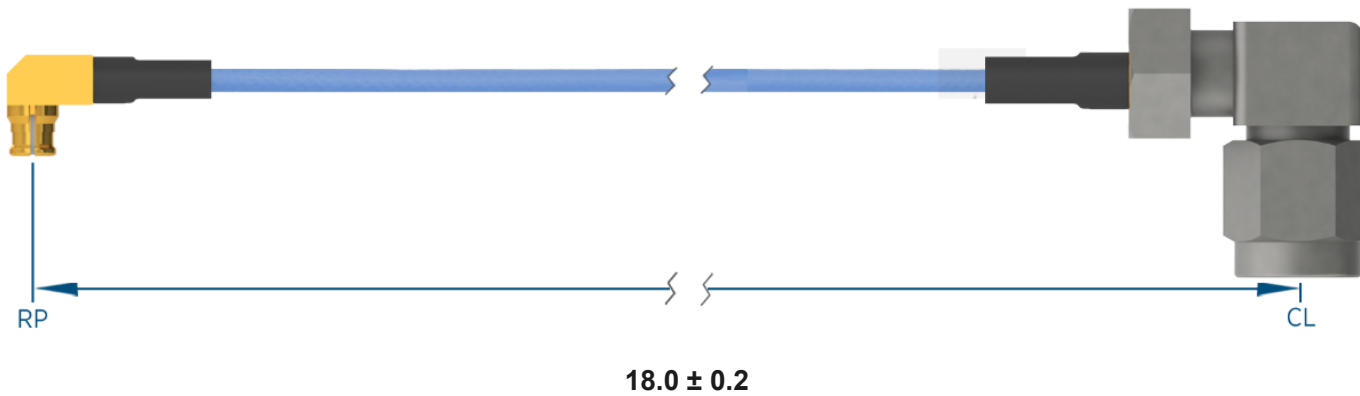


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMP R/A Female ([1222-4004](#))
SMA R/A Male ([2912-61002](#))

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.22 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMP R/A Female to SMA R/A Male 18" Cable
Assembly for Ø.047 Flexible Coax

DWG. NO.

FRSMP-047-MRSMA-180

DRAWN

2022-10-18 12:29:06