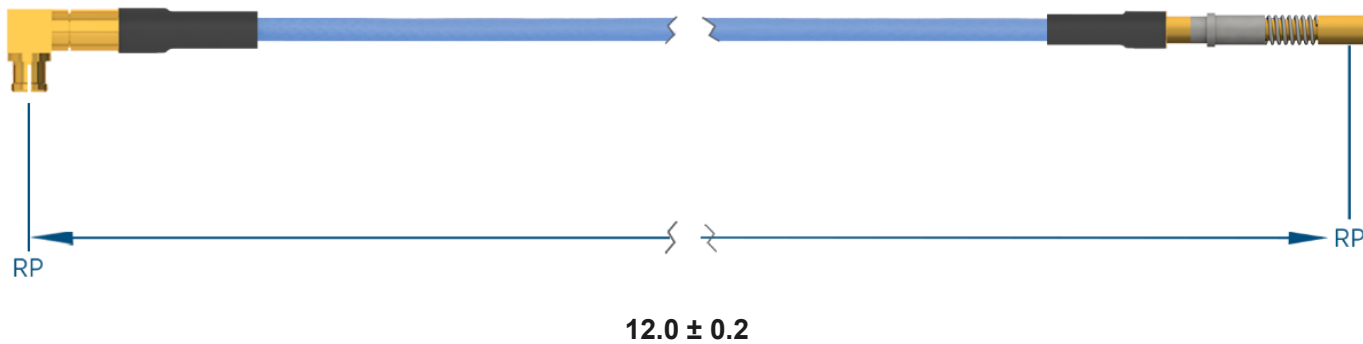


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMPM R/A Female (3222-40020)
 SMPS Size 16 Socket (SF9911-60001)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.27 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMPM R/A Female to SMPS Size 16 Socket 12" Cable
 Assembly for Ø.047 Flexible Coax

DWG. NO.

FRSMPM-047-S16DSMPS-120

DRAWN

2022-10-18 15:31:37