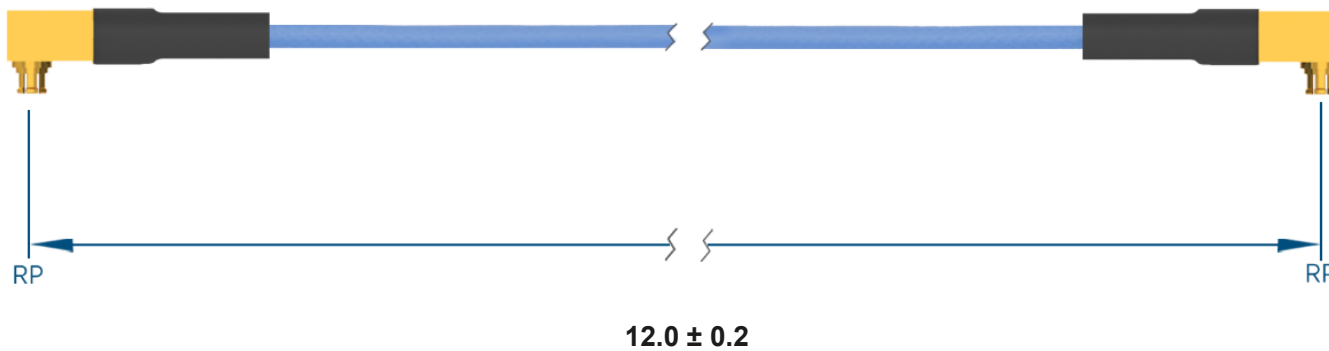


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMPS R/A Female (3822-40001)  
SMPS R/A Female (3822-40001)  
CABLE: Ø.047 Flexible Coax  
SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms  
FREQ. RANGE: DC to 40 GHz  
VSWR: 1.3:1 Max, DC to 18.0 GHz  
1.5:1 Max, 18.0 + GHz  
INSERTION LOSS: 3.27 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

SMPS R/A Female to SMPS R/A Female 12" Cable  
Assembly for Ø.047 Flexible Coax

## DWG. NO.

FRSMPS-047-FRSMPS-120

## DRAWN

2022-10-19 15:27:53