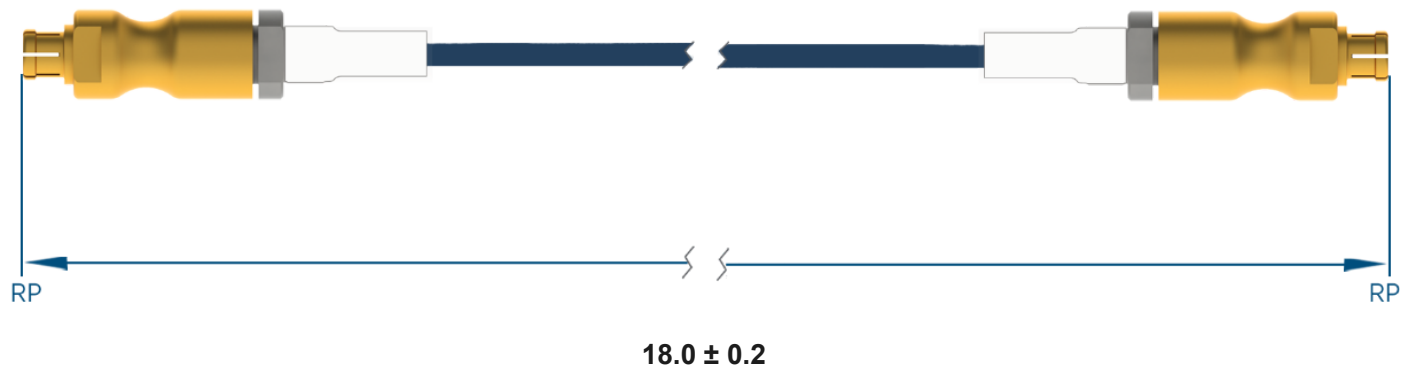


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMPM Straight Female (3221-40128)  
 SMPM Straight Female (3221-40128)

CABLE: Ø.047 SuperFlex Coax

SHRINK TUBING: M23053/5-103-0

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 26.5 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 2.57 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

SMPM Straight Female to SMPM Straight Female 18"  
 Cable Assembly for Ø.047 SuperFlex Coax

## DWG. NO.

FSSMPM-047SF-FSSMPM-180

## DRAWN

2022-10-26 12:53:01