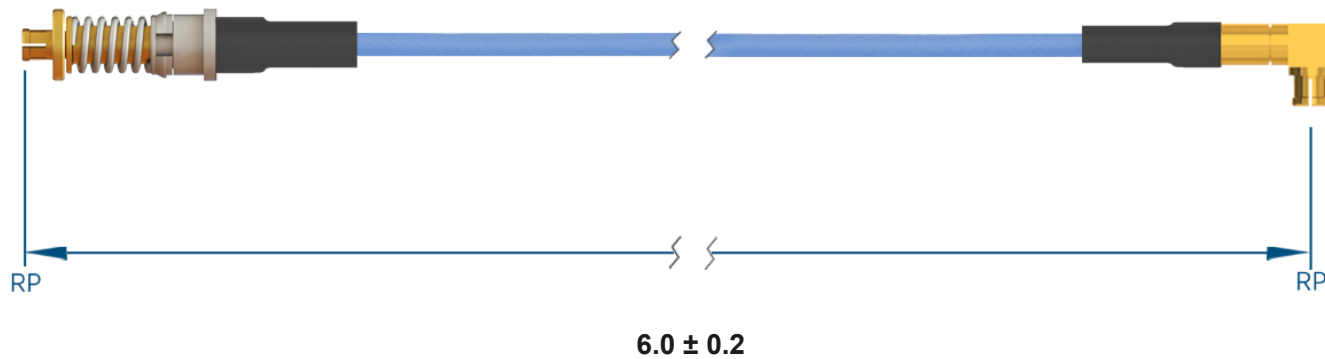


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.3 SMPM Backplane Contact (3221-40071)
 SMPM R/A Female (3222-40020)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.4:1 Max, DC to 18.0 GHz
 1.6:1 Max, 18.0 + GHz

INSERTION LOSS: 1.89 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

VITA 67.3 SMPM Backplane Contact to SMPM R/A
 Female 6" Cable Assembly for Ø.047 Flexible Coax

DWG. NO.

FV67.3SMPM-047-FRSMPM-060

DRAWN

2022-10-21 11:39:56