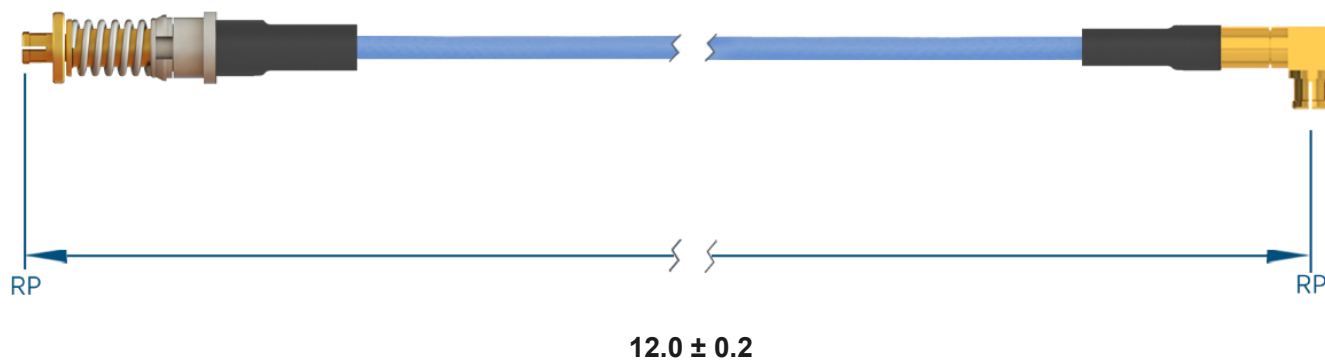


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.3 SMPM Backplane Contact (3221-40071)  
 SMPM R/A Female (3222-40020)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.27 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

VITA 67.3 SMPM Backplane Contact to SMPM R/A  
 Female 12" Cable Assembly for Ø.047 Flexible Coax

## DWG. NO.

FV67.3SMPM-047-FRSMPM-120

## DRAWN

2022-10-21 11:39:38