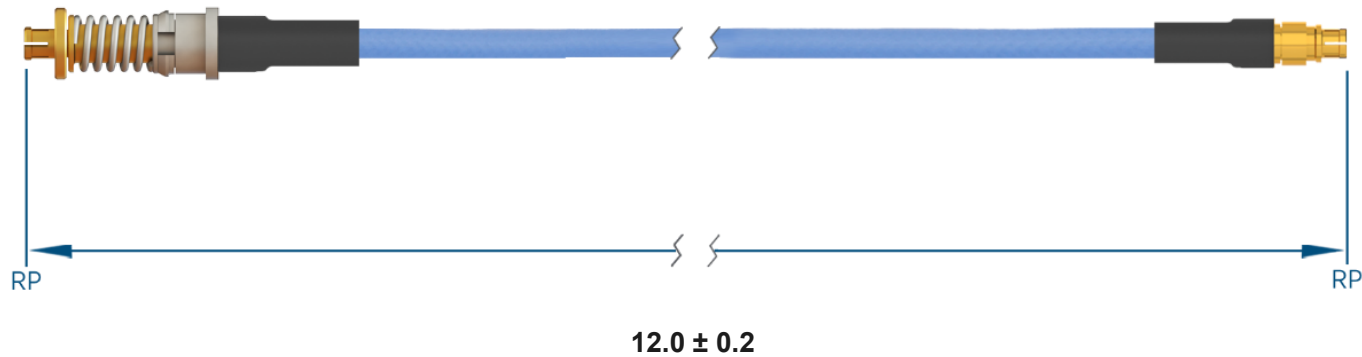


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.3 SMPM Backplane Contact (3221-40066)  
 SMPM Straight Female (3221-40006)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 2.19 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

VITA 67.3 SMPM Backplane Contact to SMPM Straight  
 Female 12" Cable Assembly for Ø.085 Flexible Coax

DWG. NO.

FV67.3SMPM-085-FSSMPM-120

DRAWN

2022-10-18 17:18:37