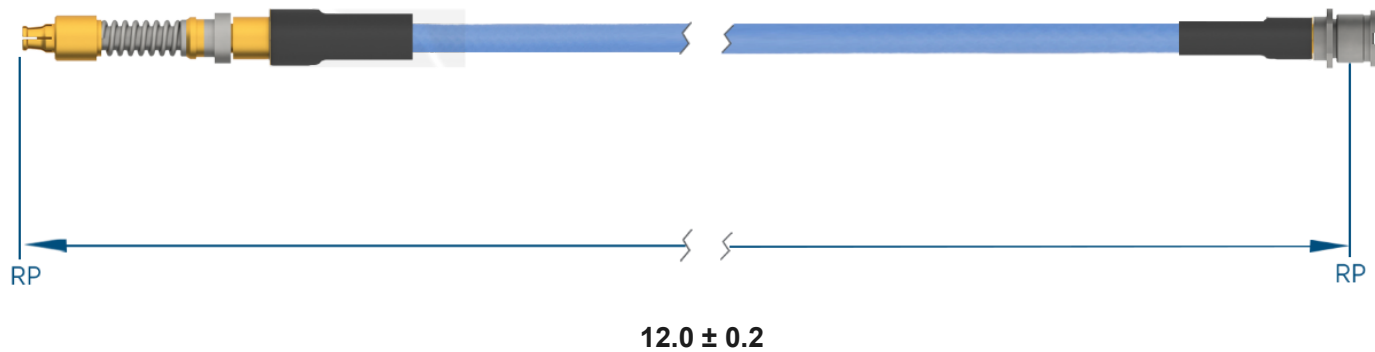


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.3 SMPS Female Backplane Contact (3821-40024)
 SMP Male Bulkhead (SF1211-6061)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 26.5 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 1.61 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

VITA 67.3 SMPS Female Backplane Contact to SMP
 Male Bulkhead 12" Cable Assembly for Ø.085 Flexible
 Coax

DWG. NO.

FV67.3SMPS-085-MBSMP-120

DRAWN

2022-10-18 16:46:09