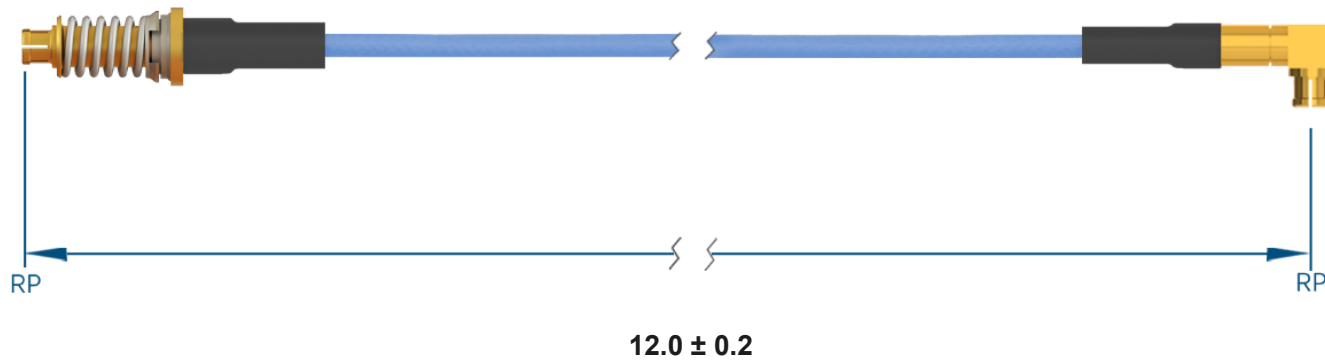


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.1/2 SMPM Plug-in Contact (3221-40019)  
 SMPM R/A Female (3222-40020)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.27 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

VITA 67.1/2 SMPM Plug-in Contact to SMPM R/A  
 Female 12" Cable Assembly for Ø.047 Flexible Coax

## DWG. NO.

FV67SMPM-047-FRSMPM-120

## DRAWN

2022-10-18 16:38:44