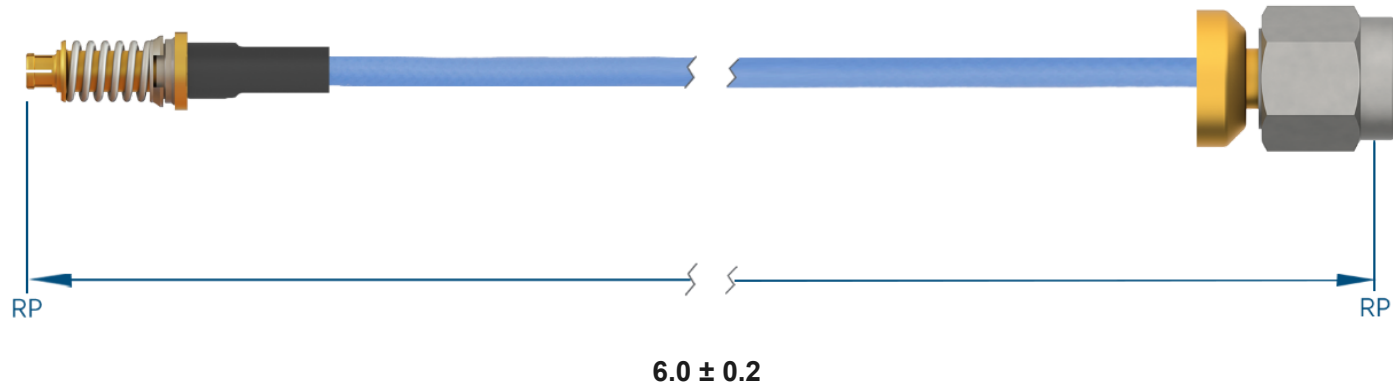


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.1/2 SMPM Plug-in Contact (3221-40022)  
SMA Low Profile Male (2911-61000)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.4:1 Max, DC to 18.0 GHz  
1.6:1 Max, 18.0 + GHz

INSERTION LOSS: 0.82 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

VITA 67.1/2 SMPM Plug-in Contact to SMA Low Profile  
Male 6" Cable Assembly for Ø.085 Flexible Coax

DWG. NO.

FV67SMPM-085-MSLPSMA-060

DRAWN

2022-10-18 15:07:35