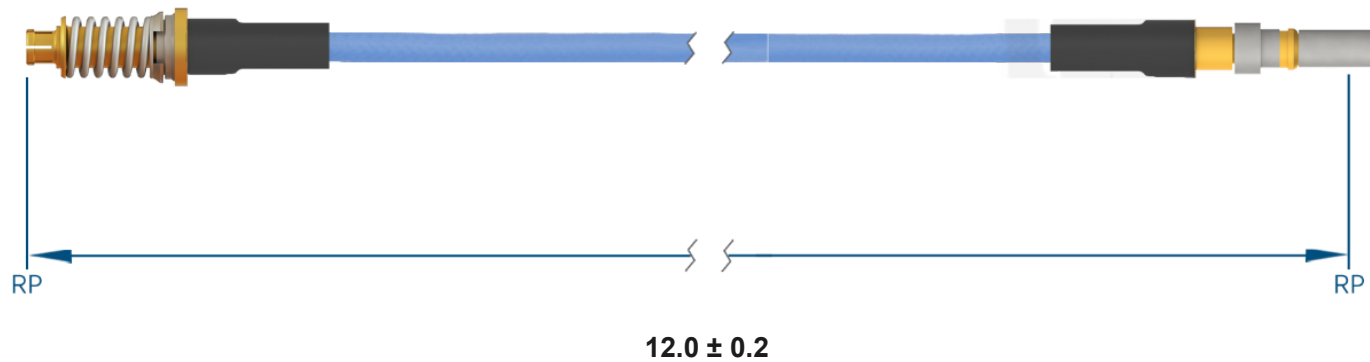


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.1/2 SMPM Plug-in Contact (3221-40022)
 VITA 67.3 SMPS Male Plug-In Contact (SF3811-60059)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 2.19 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

VITA 67.1/2 SMPM Plug-in Contact to VITA 67.3 SMPS
 Male Plug-In Contact 12" Cable Assembly for Ø.085
 Flexible Coax

DWG. NO.

FV67SMPM-085-MV67.3SMPS-120

DRAWN

2022-10-18 15:05:19