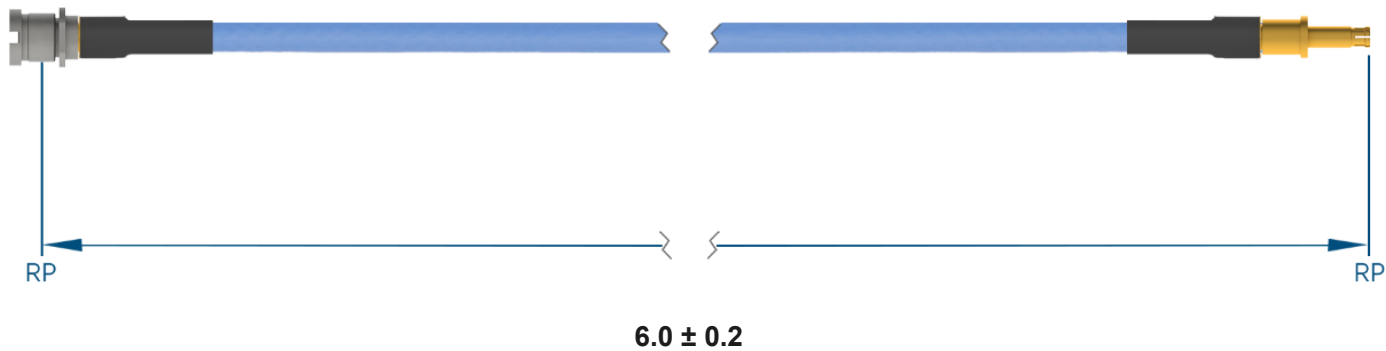


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMP Male Bulkhead (SF1211-6061)  
 SMPM Size 12 Pin (3221-4002)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 26.5 GHz

VSWR: 1.4:1 Max, DC to 18.0 GHz  
 1.6:1 Max, 18.0 + GHz

INSERTION LOSS: 1.01 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

SMP Male Bulkhead to SMPM Size 12 Pin 6" Cable  
 Assembly for Ø.085 Flexible Coax

## DWG. NO.

MBSMP-085-P12DSMPM-060

## DRAWN

2022-10-18 14:51:46