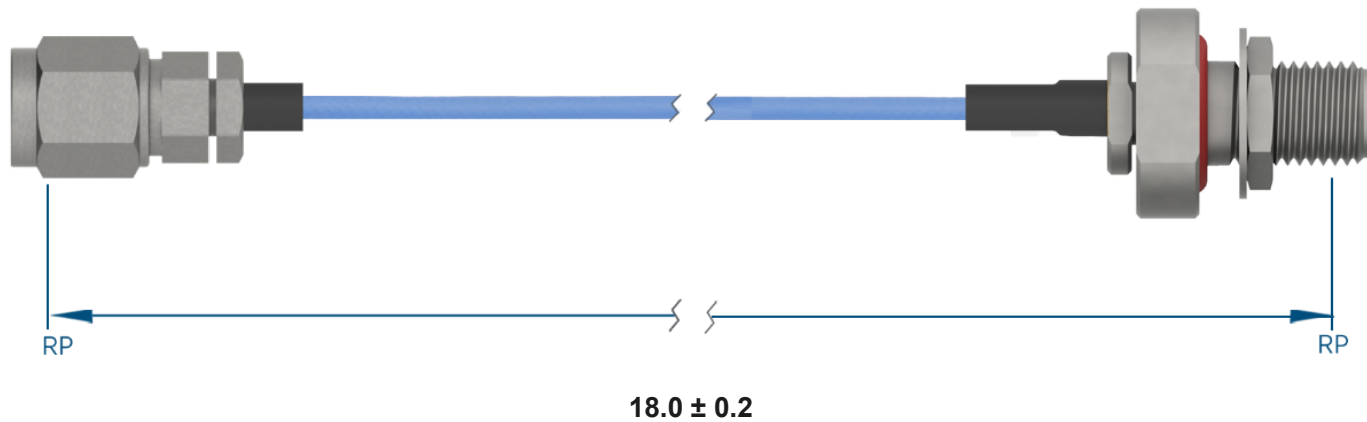


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: 1.85mm Straight Male (SF3311-60002)  
 2.92mm Bulkhead Female (SF1521-60045)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 4.65 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

1.85mm Straight Male to 2.92mm Bulkhead Female 18"  
 Cable Assembly for Ø.047 Flexible Coax

## DWG. NO.

MS185-047-FB292-180

## DRAWN

2022-10-18 13:02:18