
## PRODUCT DATA DRAWING

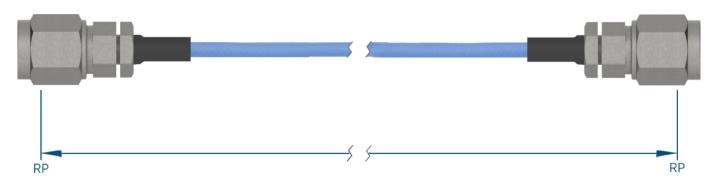

 $6.0 \pm 0.2$ 

## **MATERIAL**

CONNECTORS: 1.85mm Straight Male (SF3311-60003)

1.85mm Straight Male (SF3311-60003)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

## **PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 65 GHz

VSWR: 1.4:1 Max, DC to 18.0 GHz

1.6:1 Max, 18.0 + GHz

INSERTION LOSS: 1.78 dB Max

## NOTES

1. See individual data drawings for connector specifications

2. Dimensions shown are in inches



TITLE:

1.85mm Straight Male to 1.85mm Straight Male 6" Cable Assembly for Ø.085 Flexible Coax

DWG. NO.

MS185-085-MS185-060

DRAWN

2022-10-18 11:22:12