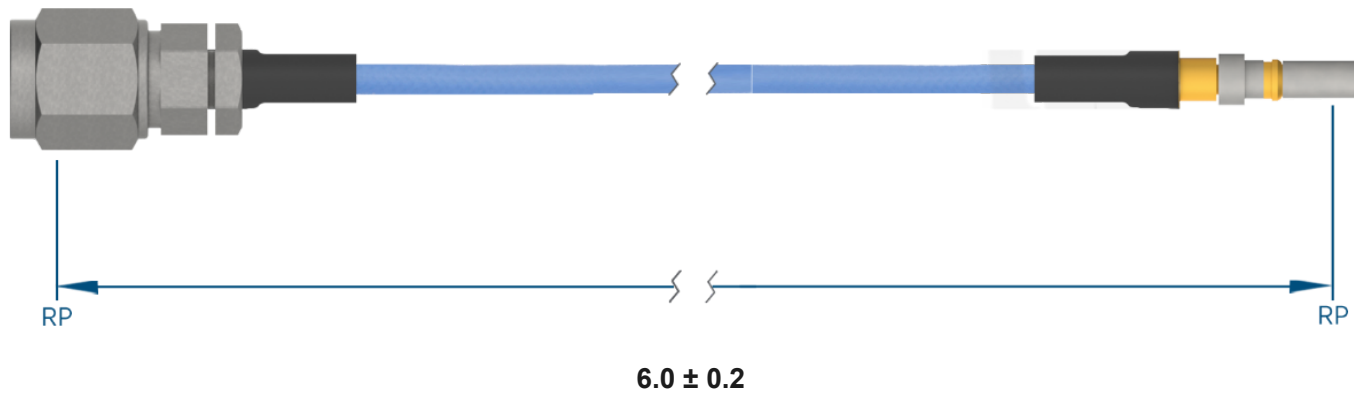


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: 1.85mm Straight Male (SF3311-60003)  
 VITA 67.3 SMPS Male Plug-In Contact (SF3811-60059)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.4:1 Max, DC to 18.0 GHz  
 1.6:1 Max, 18.0 + GHz

INSERTION LOSS: 1.35 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

1.85mm Straight Male to VITA 67.3 SMPS Male Plug-In  
 Contact 6" Cable Assembly for Ø.085 Flexible Coax

## DWG. NO.

MS185-085-MV67.3SMPS-060

## DRAWN

2022-10-18 11:17:27