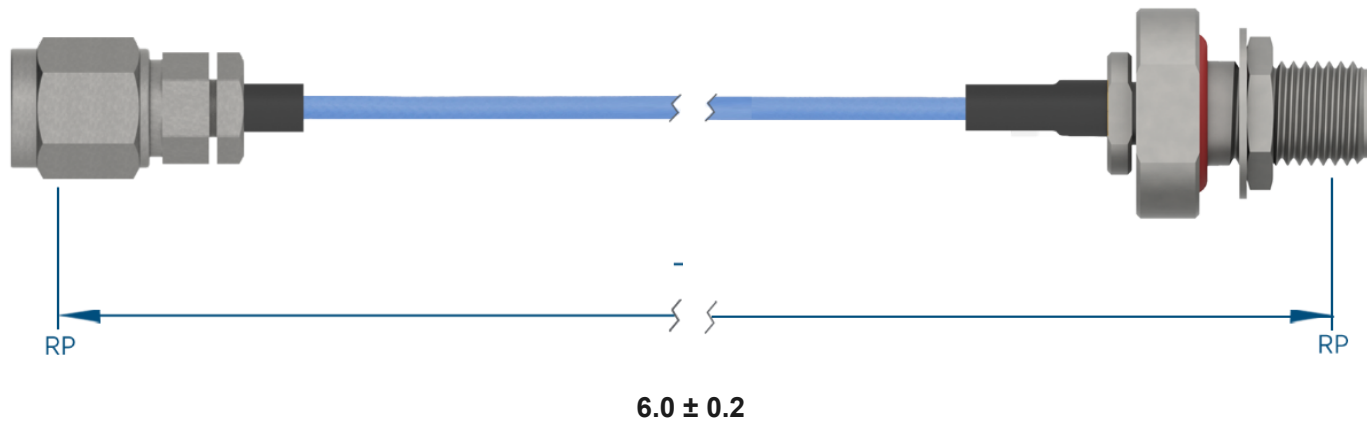


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: 2.4mm Straight Male (SF1611-60001)  
 2.92mm Bulkhead Female (SF1521-60045)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.4:1 Max, DC to 18.0 GHz  
 1.6:1 Max, 18.0 + GHz

INSERTION LOSS: 1.89 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

2.4mm Straight Male to 2.92mm Bulkhead Female 6"  
 Cable Assembly for Ø.047 Flexible Coax

## DWG. NO.

MS24-047-FB292-060

## DRAWN

2022-10-18 11:13:43