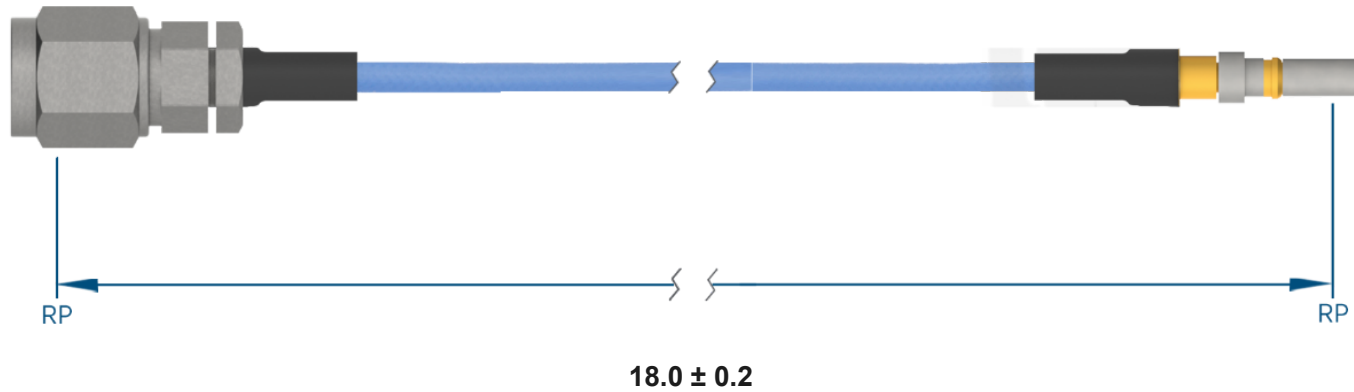


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: 2.4mm Straight Male (SF1611-60003)  
VITA 67.3 SMPS Male Plug-In Contact (SF3811-60059)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.03 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches

**TITLE:**

2.4mm Straight Male to VITA 67.3 SMPS Male Plug-In  
Contact 18" Cable Assembly for Ø.085 Flexible Coax

**DWG. NO.**

MS24-085-MV67.3SMPS-180

**DRAWN**

2022-10-17 16:53:38