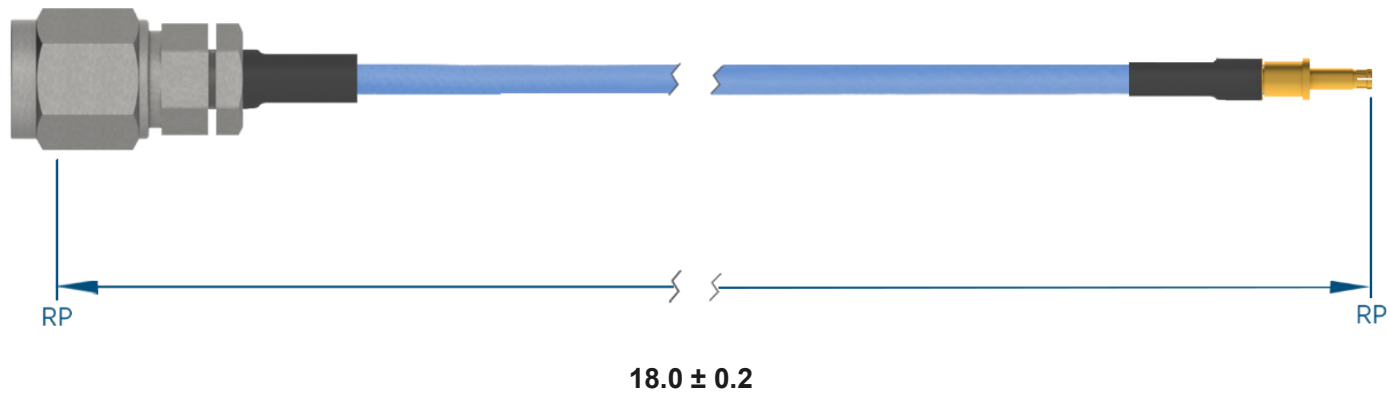


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: 2.4mm Straight Male (SF1611-60003)  
 SMPM Size 12 Pin (3221-4002)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 50 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.27 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

2.4mm Straight Male to SMPM Size 12 Pin 18" Cable  
 Assembly for Ø.085 Flexible Coax

## DWG. NO.

MS24-085-P12DSMPM-180

## DRAWN

2022-10-17 16:52:22