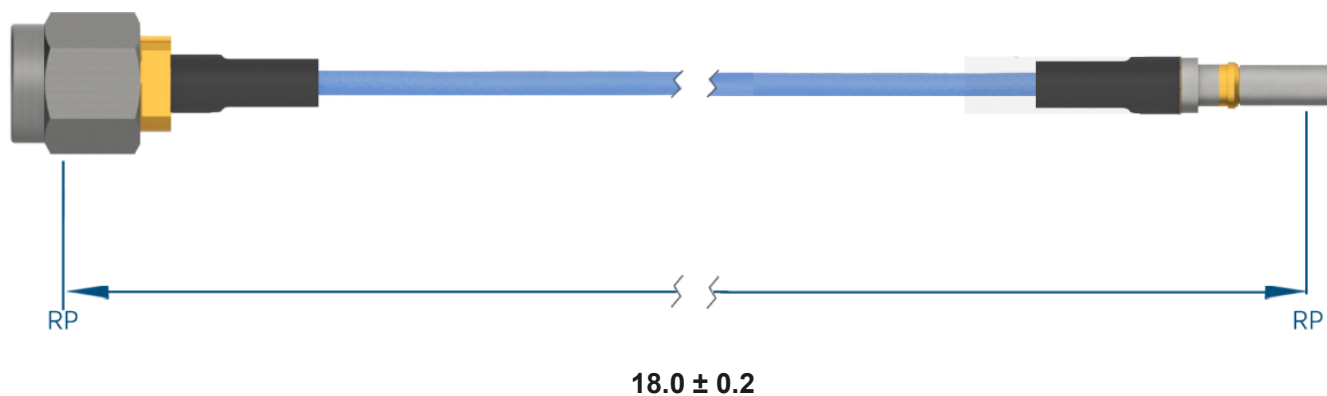


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMA Straight Male (SF2911-60172)  
 VITA 67.3 SMPS Male Plug-In Contact (SF3811-60060)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.22 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

SMA Straight Male to VITA 67.3 SMPS Male Plug-In  
 Contact 18" Cable Assembly for Ø.047 Flexible Coax

## DWG. NO.

MSSMA-047-MV67.3SMPS-180

## DRAWN

2022-10-17 15:18:50