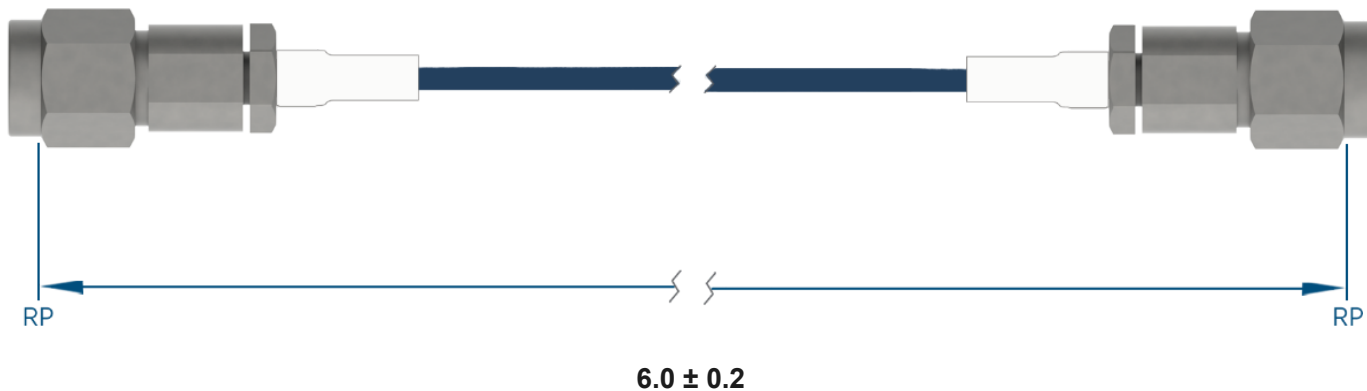


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMA Straight Male (SF2911-60966)
SMA Straight Male (SF2911-60966)
CABLE: Ø.047 SuperFlex Coax
SHRINK TUBING: M23053/5-103-0

PERFORMANCE

IMPEDANCE: 50 Ohms
FREQ. RANGE: DC to 18 GHz
VSWR: 1.4:1 Max, DC to 18.0 GHz
1.6:1 Max, 18.0 + GHz
INSERTION LOSS: 0.94 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMA Straight Male to SMA Straight Male 6" Cable
Assembly for Ø.047 SuperFlex Coax

DWG. NO.

MSSMA-047SF-MSSMA-060

DRAWN

2022-10-17 15:14:40