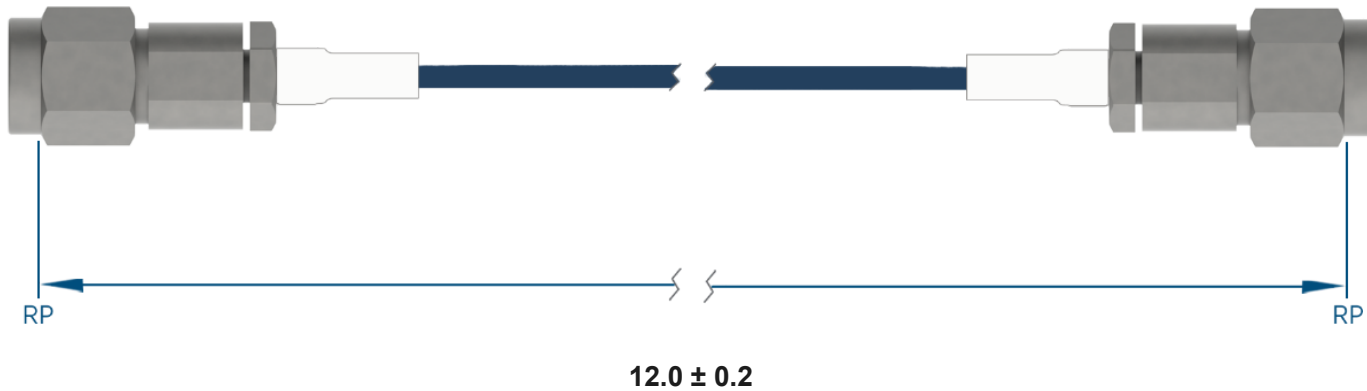


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMA Straight Male (SF2911-60966)  
 SMA Straight Male (SF2911-60966)

CABLE: Ø.047 SuperFlex Coax

SHRINK TUBING: M23053/5-103-0

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 1.54 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

SMA Straight Male to SMA Straight Male 12" Cable  
 Assembly for Ø.047 SuperFlex Coax

## DWG. NO.

MSSMA-047SF-MSSMA-120

## DRAWN

2022-10-17 15:13:11