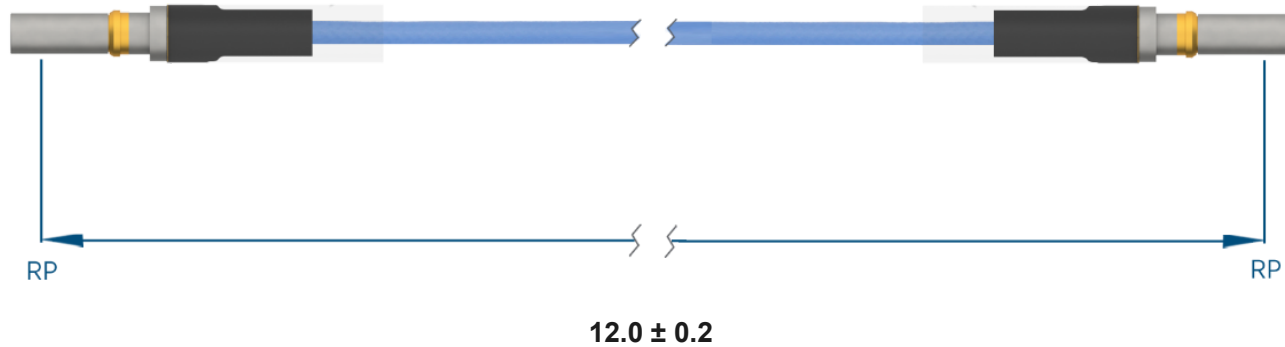


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.3 SMPS Male Plug-In Contact (SF3811-60060)
 VITA 67.3 SMPS Male Plug-In Contact (SF3811-60060)

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.27 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

VITA 67.3 SMPS Male Plug-In Contact to VITA 67.3
 SMPS Male Plug-In Contact 12" Cable Assembly for
 Ø.047 Flexible Coax

DWG. NO.

MV67.3SMPS-047-MV67.3SMPS-120

DRAWN

2022-10-17 14:47:00