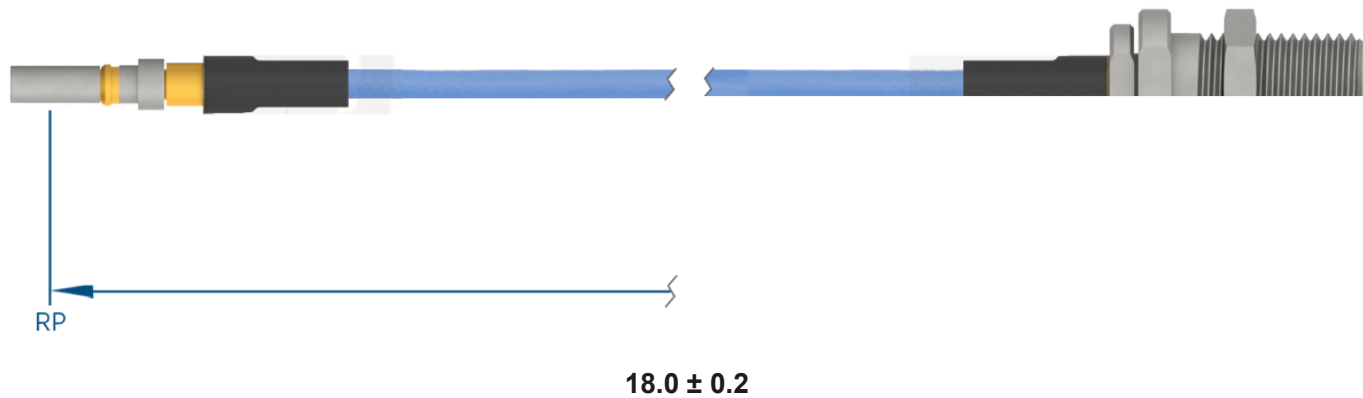


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.3 SMPS Male Plug-In Contact (SF3811-60059)
 2.92mm Bulkhead Female (SF1521-60025)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.03 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

VITA 67.3 SMPS Male Plug-In Contact to 2.92mm
 Bulkhead Female 18" Cable Assembly for Ø.085
 Flexible Coax

DWG. NO.

MV67.3SMPS-085-FB292-180

DRAWN

2022-10-17 14:36:45