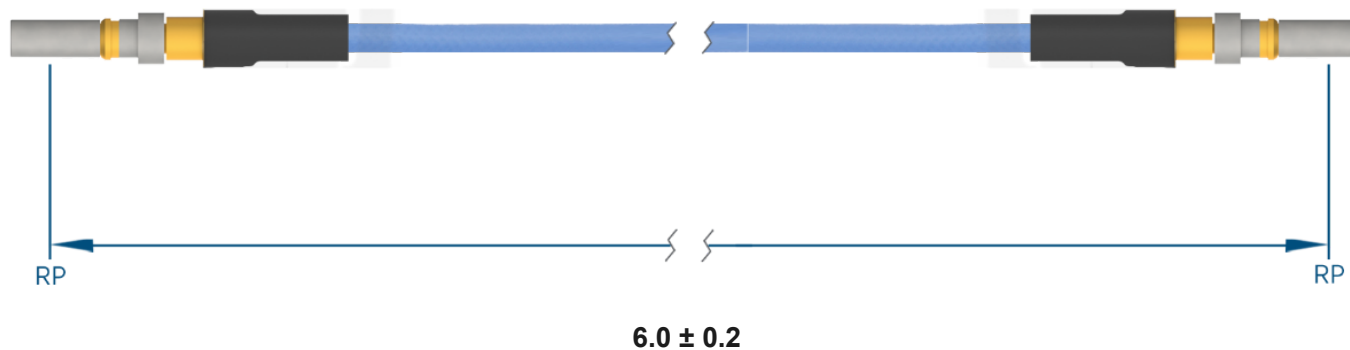


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.3 SMPS Male Plug-In Contact (SF3811-60059)
 VITA 67.3 SMPS Male Plug-In Contact (SF3811-60059)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.4:1 Max, DC to 18.0 GHz
 1.6:1 Max, 18.0 + GHz

INSERTION LOSS: 1.35 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

VITA 67.3 SMPS Male Plug-In Contact to VITA 67.3
 SMPS Male Plug-In Contact 6" Cable Assembly for
 Ø.085 Flexible Coax

DWG. NO.

MV67.3SMPS-085-MV67.3SMPS-060

DRAWN

2022-10-17 14:31:15