


# PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	DCN 52783	07/23	SEE PDM

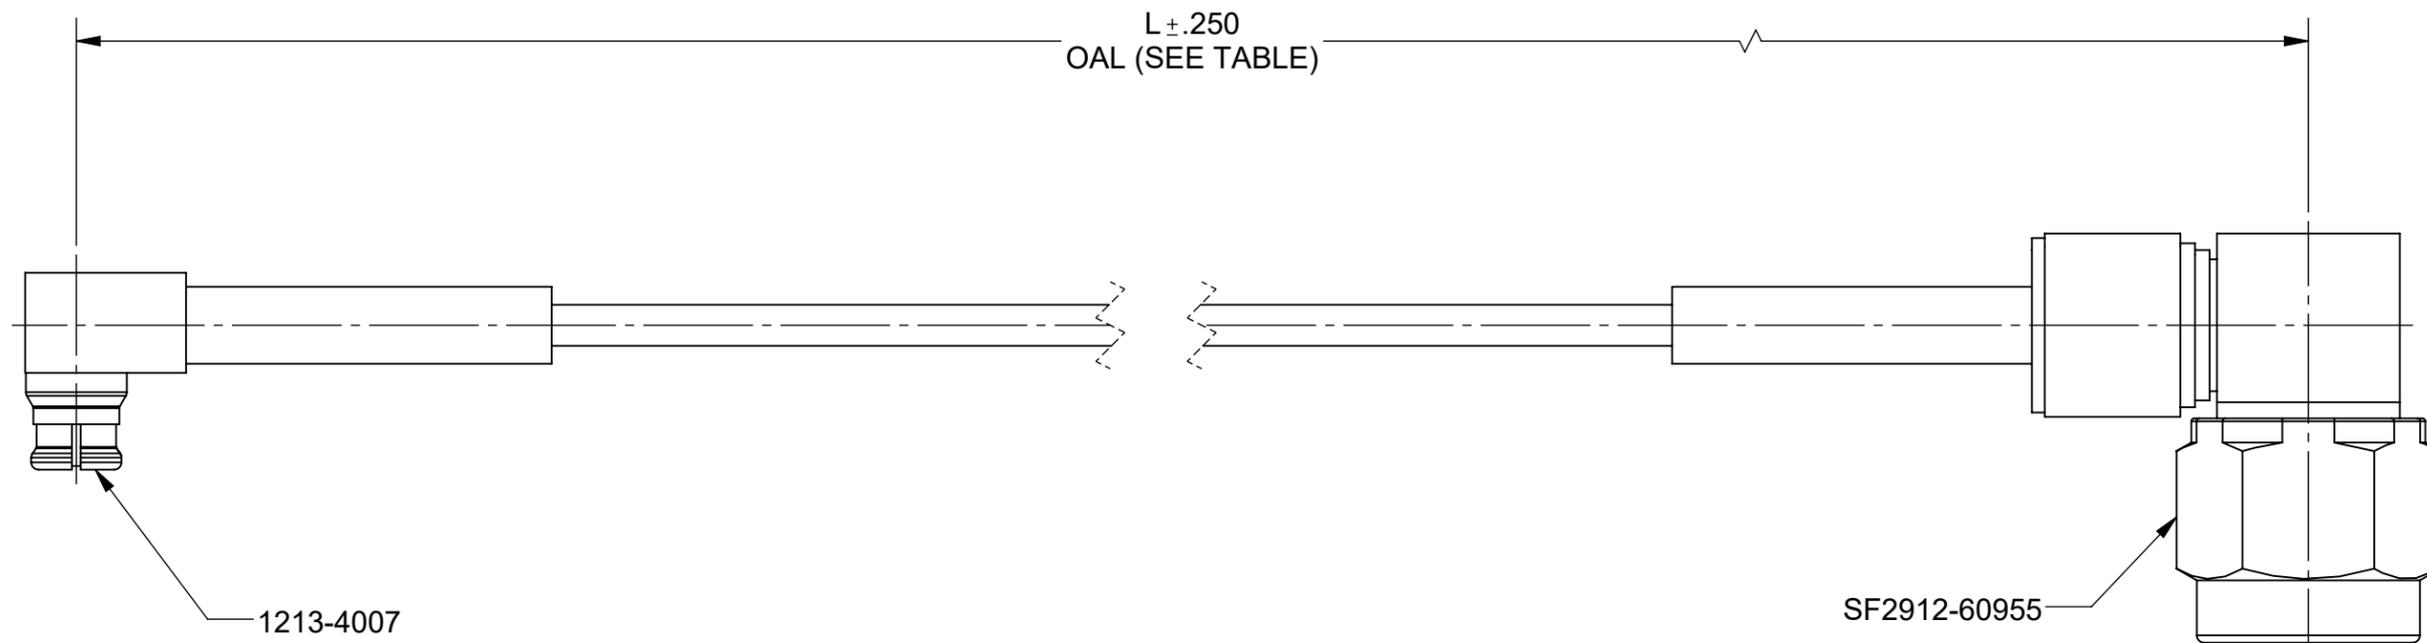


**MATERIAL:**

- CONNECTORS: SMP R/A FEMALE (1213-4007)  
 SMA R/A MALE (SF2912-60955)
- CABLE: FLEXIBLE Ø.047 CABLE (200-70-479)
- SHRINK TUBING: M23053/5

**PERFORMANCE:**

- IMPEDANCE: 50 OHMS  
 FREQ. RANGE: DC TO 18.0 GHz

SV P/N	L (OAL)
7012-1330	6.000"
7012-1331	12.000"
7012-1332	24.000"

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1'0" X°X' ±15'	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	 www.svmicrowave.com TITLE: SMP FEMALE R/A TO SMA MALE R/A FOR FLEXIBLE .047 CABLE ASSEMBLY
FINISH: SEE NOTES	DECIMAL: X ±.030 .XX ±.010 .XXX ±.005		
SURFACE AREA: N/A	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	DRAWN: VB 08/04/17 CHECKED: SEE PDM APPROVED: SEE PDM	SIZE DWG. NO. 7012-1330-1332
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.	THIRD ANGLE PROJECTION 		SCALE: 4:1